



**HERCULES**

# **STRONG GUARD<sup>®</sup> HTL**

PREMIUM | LONG HAUL | TRAILER



**The name says it all, the Strong Guard HTL is a tough tire designed for regional and long haul trailer positions in highway service.**

- Upgraded super tensile strength steel cord provides extra durability to the carcass and steel belts, resulting in lower heat generation while protecting the integrity of the tire casing for the long haul.
- Advanced silica compound technology allows the Strong Guard HTL to have the best of both worlds by optimizing fuel efficiency and removal mileage with no sacrifice to wet grip.




# HERCULES STRONG GUARD® HTL

PREMIUM | LONG HAUL | TRAILER



## PRODUCT INNOVATIONS

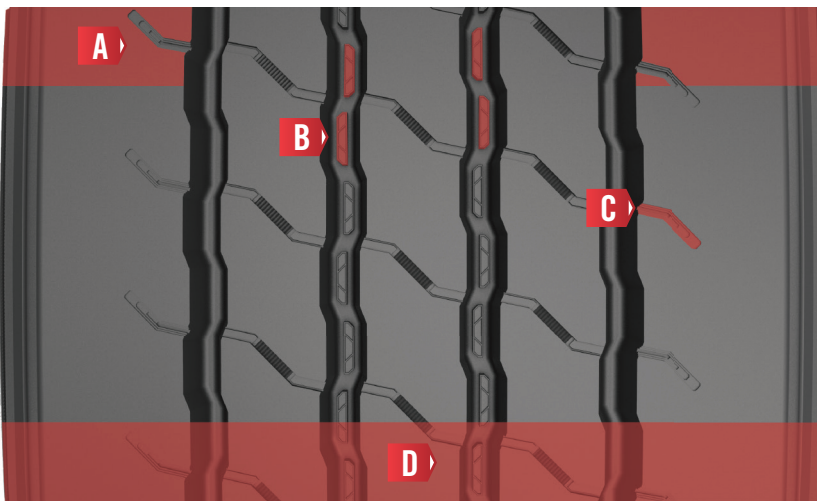

- A) WIDE SHOULDER 5 RIB TREAD DESIGN**  
Promotes uniform wear, enhanced lateral stability and reduced tread squirm.
- B) STONE EJECTOR PLATFORM**  
Optimal 14/32nds tread depth enhanced with stone ejectors guard the belt package and casing from premature damage caused by stone drilling for better retreadability.
- C) SHOULDER WEAR INDICATORS**  
Unique stair-step indicators detect irregular shoulder wear and alert the driver corrective action is required before the tire is damaged.
- D) INNOVATIVE SILICA TREAD COMPOUND**  
New generation active silica tread compound delivers a balance of long wear and improved rolling resistance for lower costs per mile.

Item #	Tire Size & Service Description	PR/LR	RPM	Min. Rim Width	Max. Rim Width	Single Max Load	Dual Max Load	Max PSI	Overall Diameter	Section Width	Tread Depth (32nds)	Tire Weight (lbs.)	PRICE
96831	11R22.5/14 144/142M	14/G	501	7.50	8.25	6175	5840	105	41.50	10.98	13.9	108.03	
96832	11R22.5/16 146/143M	16/H	501	7.50	8.25	6610	6005	120	41.50	10.98	13.9	110.23	
96833	11R24.5/14 146/143M	14/G	478	7.50	8.25	6610	6005	105	43.46	10.98	13.9	112.44	
96834	11R24.5/16 149/146M	16/H	478	7.50	8.25	7160	6610	120	43.46	10.98	13.9	114.64	
96837	285/75R24.5/14 144/141L	14/G	503	8.25	8.25	6175	5675	110	41.34	11.14	13.9	110.23	
96835	295/75R22.5/14 144/141M	14/G	521	8.25	9.00	6175	5675	110	39.92	11.73	13.9	101.41	
96836	295/75R22.5/16 146/143M	16/H	521	8.25	9.00	6610	6005	120	39.92	11.73	13.9	103.62	



Delivered by **STD**

[www.herculestirecommercial.com](http://www.herculestirecommercial.com)

